

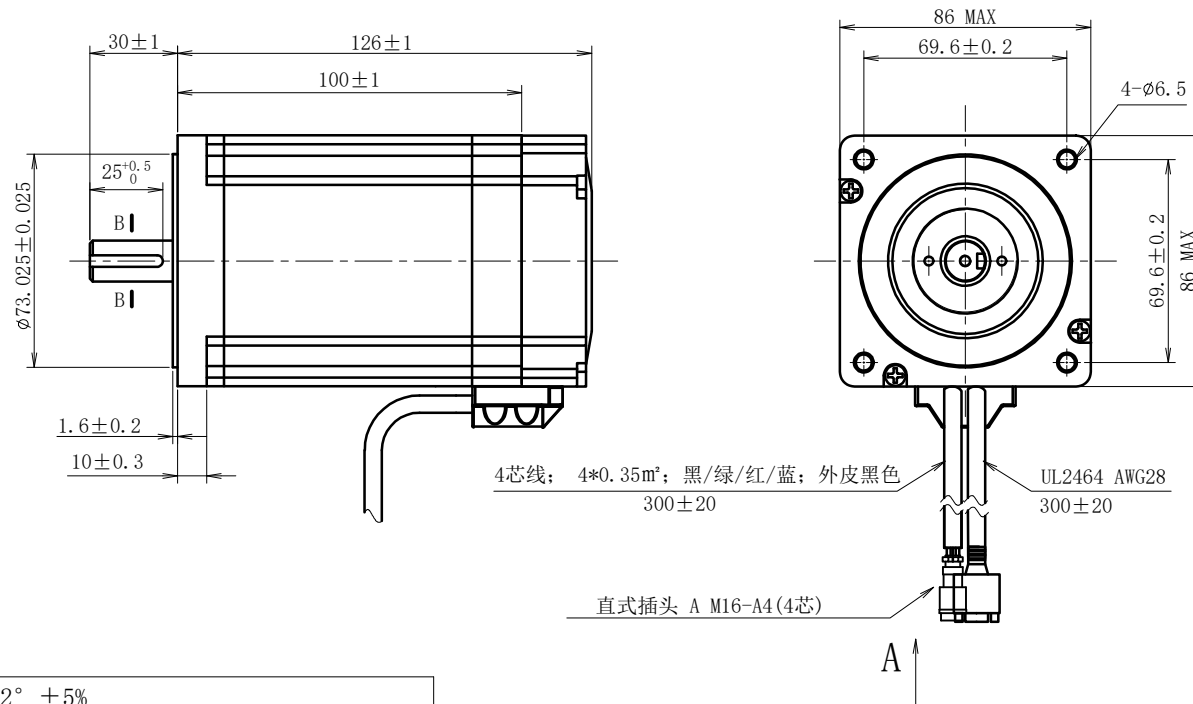





接线图/Wiring Diagram




电器特性参数/ELECTRICAL PARAMETER

步 进 角	STEP ANGEL	1.2° ±5%
相 数	PHASES	3
额定电压	RATED VOLTAGE	9 V
额定电流	RATED CURRENT	5.0 A
电 阻	RESISTANCE	--- ohm±10% at 20° C
电 感	INDUCTANCE	--- mH±20% at 1k Hz, 1Vrms
保持力矩	HOLDING TORQUE	6.5 N.m
运行力矩 (—PPS)		--- MIN.
RUNING TORQU(AT —PPS)		(24V.DC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻	INSULATION RESISTANCE	100 MΩ 以上./MIN.
绝缘等级	INSULATION CLASS	Class B
温度上升	TEMPERATURE RISE	80K MAX.
转子惯量	ROTOR INERTIA	1600 g.cm (2.63oz. in)
重 量	WEIGHT	APPRO. 3200g



VIEW A



端子线序 PIN NO.	1. V	2. U		4. W
电机引线颜色 LEAD COLOR	红	白	黄 绿	黑

编码器

颜色	黑	红	绿	绿/黑	蓝	蓝/黑
信号	GND	+5V	A+	A-	B+	B-

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)							品 名 步进电机规格书		
COMPANY CHOP&SIGNATURE (盖章&签名)									
一般公差 TOLERANCE ±0.3/±3°		版本	年 月 日	变更番号	变 更 内 容	设计	备 注 NOTE	REV.	A
制 图/DRAWN		比例 SCALE	1:2	物料号	型 号	86HS3120-05	三视图 THIRD ANGLE PROJECTION 		
设 计/DESIGNED									
审 核/CHECKED									
承 认/APPROVED		上海四横电机制造有限公司					页 SHEET	1/1	