


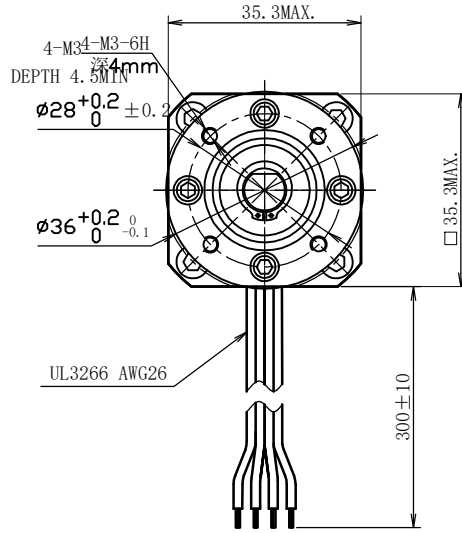
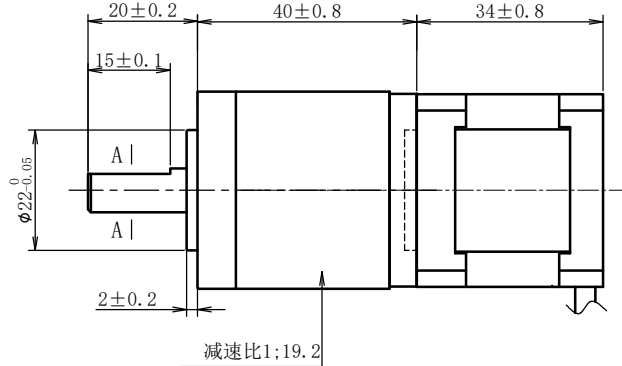


符合RoHS指令要求
CONFORM TO RoHS INSTRUCTIONS



电器特性参数/ELECTRICAL PARAMETER

步 进 角 STEP ANGEL	1.8° ±5%
相 数 PHASES	2
额定电压 RATED VOLTAGE	2.7 V
额定电流 RATED CURRENT	1 A
电 阻 RESISTANCE	2.7ohm±10% AT 20° C
电 感 INDUCTANCE	mH±20% AT 1k Hz, 1V RMS
保持力矩 HOLDING TORQUE	0.14N·m
运行力矩 (—PPS) RUNING TORQUR(AT —PPS)	--- MIN. (24VDC, RATED CURRENT, FULL STEP)
绝缘耐压 DIELECTRIC STRENGTH	500V AC 1 MINUTIE
绝缘电阻 INSULATION RESISTANCE	100 MΩ MIN
绝缘等级 INSULATION CLASS	B
温度上升 TEMPERATURE RISE	80K MAX. (SEE NOTE 2)
转子惯量 ROTOR INERTIA	14g·cm ² (0.12oz·in ²)
重 量 WEIGHT	APPROX. 180g (6.43 OZ)
允许轴向负载 ALLOWABLE THRUST LOAD	15N
允许径向负载 ALLOWABLE RADIAL LOAD	75N(ON THE SHAFT END)



CONFIRMED&ACCEPTED BY CUTOMER (客户确认&接受)							物料号			
CUSTOMER'S COMPANY CHOP&SGNATURE 盖章&签名										
一般公差 TOLERANCE ±0.3/±3°		版本 REV.	年 月 日 DATE	变更番号 ECO NO.	变 更 内 容 REVISIONS		设计 BY	备 注 NOTE	REV.	A
制 图/DRAWN		比例 SCALE		1:1	品 名 TITLE	35H234-1004AG19.2		三视图 THIRD ANGLE PROJECTION		
设 计/DESIGNED										
审 核/CHECKED										
承 认/APPROVED		上海四横电机制造有限公司							页 SHEET	1/1