

付台KOH5指令安水
CONFORM TO RoHS INSTRUCTIONS



A

B

C

D

E

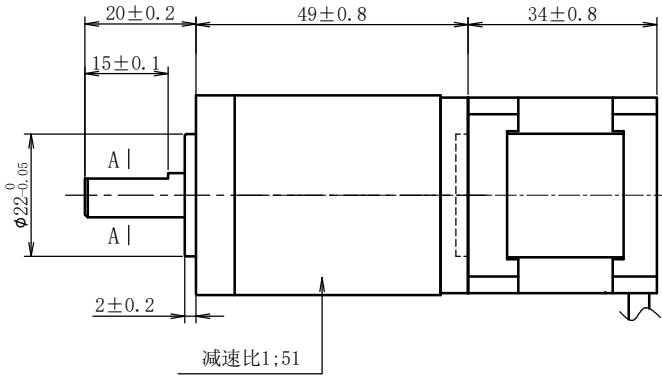

电器特性参数/ELECTRICAL PARAMETER

步 进 角	STEP ANGEL	1.8° ±5%
相 数	PHASES	2
额定电压	RATED VOLTAGE	2.7 V
额定电流	RATED CURRENT	1 A
电 阻	RESISTANCE	2.7ohm±10% AT 20° C
电 感	INDUCTANCE	mH±20% AT 1k Hz, 1V RMS
保持力矩	HOLDING TORQUE	0.14N-m
运行力矩 (---PPS)	RUNING TORQUR(AT ---PPS)	--- MIN. (24VDC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V AC 1 MINUTIE
绝缘电阻	INSULATION RESISTANCE	100 MΩ MIN
绝缘等级	INSULATION CLASS	B
温度上升	TEMPERATURE RISE	80K MAX. (SEE NOTE 2)
转子惯量	ROTOR INERTIA	14g-cm ² (0.12oz-in ²)
重 量	WEIGHT	APPROX. 180g (6.43 OZ)
允许轴向负载	ALLOWABLE THRUST LOAD	15N
允许径向负载	ALLOWABLE RADIAL LOAD	75N(ON THE SHAFT END)

CO
CUSTOM
CHOP&S
盖章&S
一般
TOLE
制 |
设 |
审 |
承 |