




符合RoHS指令要求
CONFORM TO RoHS INSTRUCTIONS

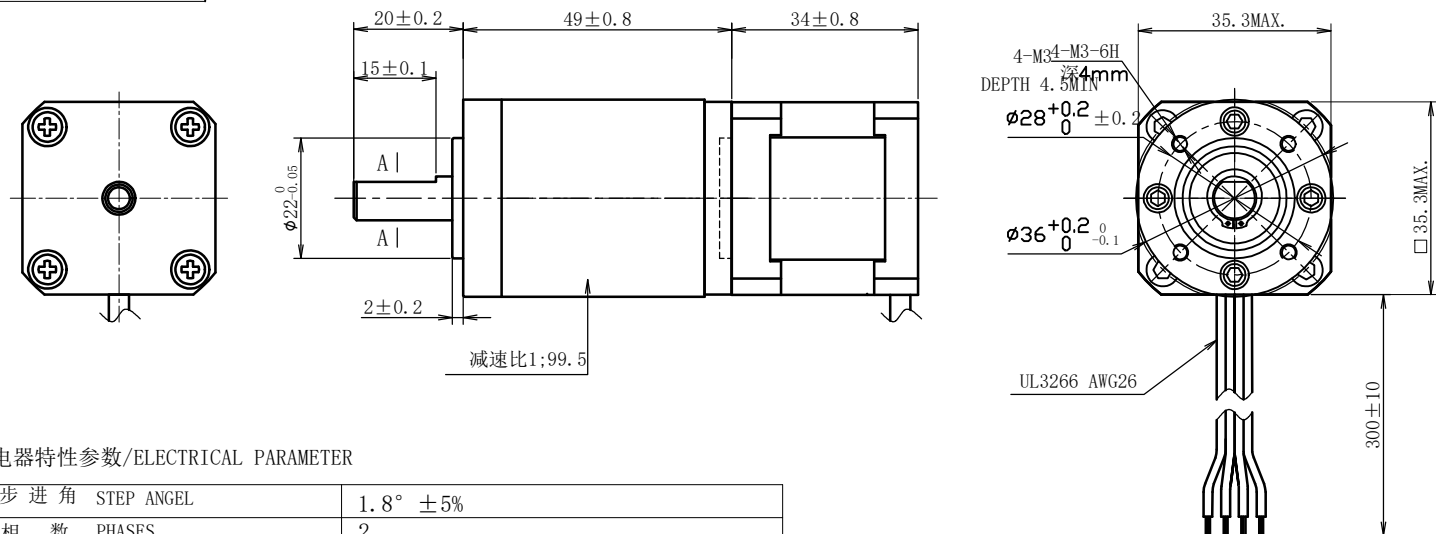

电器特性参数/ELECTRICAL PARAMETER

步 进 角	STEP ANGLE	1.8° ±5%
相 数	PHASES	2
额定电压	RATED VOLTAGE	2.7 V
额定电流	RATED CURRENT	1 A
电 阻	RESISTANCE	2.7ohm±10% AT 20° C
电 感	INDUCTANCE	mH±20% AT 1k Hz, 1V RMS
保持力矩	HOLDING TORQUE	0.14N·m
运行力矩 (—PPS)		— MIN.
RUNING TORQUR(AT —PPS)		(24VDC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V AC 1 MINUTIE
绝缘电阻	INSULATION RESISTANCE	100 MΩ MIN
绝缘等级	INSULATION CLASS	B
温度上升	TEMPERATURE RISE	80K MAX. (SEE NOTE 2)
转子惯量	ROTOR INERTIA	14g·cm ² (0.12oz·in ²)
重 量	WEIGHT	APPROX. 180g (6.43 OZ)
允许轴向负载	ALLOWABLE THRUST LOAD	15N
允许径向负载	ALLOWABLE RADIAL LOAD	75N(ON THE SHAFT END)



CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)								物料号	
CUSTOMER'S COMPANY CHOP&SIGNATURE 盖章&签名									
一般公差 TOLERANCE	±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECO NO.	变 更 内 容 REVISIONS		设计 BY	备 注 NOTE	REV. A
制 图/DRAWN		比例 SCALE 单位 UNIT		1:1 mm	品 名 TITLE	35H234-1004AG99.5	 三视图 THIRD ANGLE PROJECTION		
设 计/DESIGNED									
审 核/CHECKED									
承 认/APPROVED		上海四横电机制造有限公司						页 SHEET	1/1