

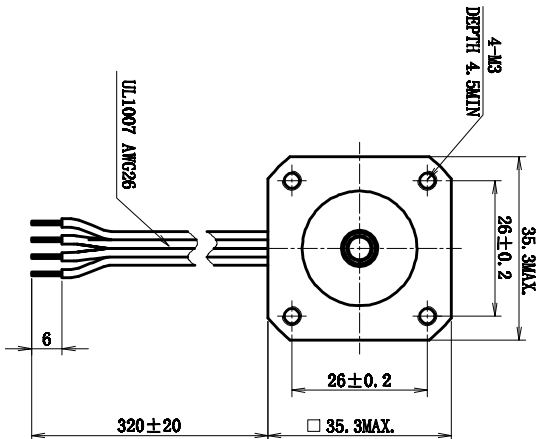


符合ROHS指令要求
CONFORM TO ROHS INSTRUCTIONS

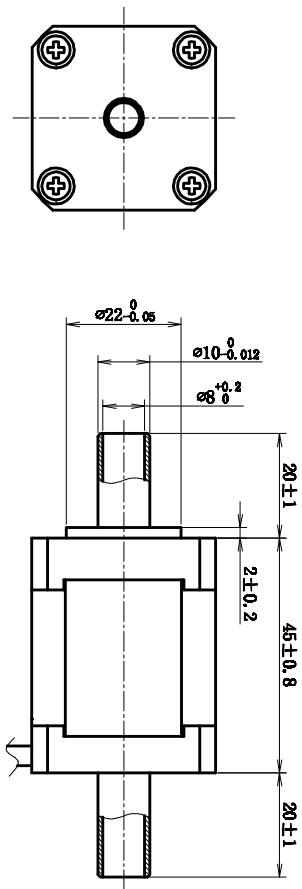

电器特性参数/ELECTRICAL PARAMETER

步 进 角 STEP ANGLE	1.8° ±5%
相 数 PHASES	2
额定电压 RATED VOLTAGE	2.7 V
额定电流 RATED CURRENT	1 A
电 阻 RESISTANCE	3.4 ohm±10% AT 20° C
电 感 INDUCTANCE	mH±20% AT 1k Hz, 1V RMS
保持力矩 HOLDING TORQUE	0.14N·m
运行力矩 (—PPS) RUNNING TORQUE(AT —PPS)	— MIN.
绝缘耐压 DIELECTRIC STRENGTH	(24VDC, RATED CURRENT, FULL STEP)
绝缘电阻 INSULATION RESISTANCE	500V AC 1 MINUTIE
绝缘等级 INSULATION CLASS	100 MΩ MIN
温度上升 TEMPERATURE RISE	B
转子惯量 ROTOR INERTIA	80K MAX. (SEE NOTE 2)
重 量 WEIGHT	14g·cm ² (0.12oz·in ²)
允许轴向负载 ALLOWABLE THRUST LOAD	APPROX. 180g (6.43 OZ)
允许径向负载 ALLOWABLE RADIAL LOAD	15N
	75N(ON THE SHAFT END)

CONFIRMED/ACCEPTED BY CUSTOMER (客户确认接受)								型号/MODEL	
CUSTOMER'S COMPANY 客户名称								3SE245-1004BZT-08-001	
DESIGNER 设计/DESIGNED		Taylor/2017-09-29		SCALE 比例		1:1		品 名 STEPING MOTOR SPECIFICATION	
CHECKER 审核/CHECKED		Taylor/2017-09-29		UNIT 单位		mm		备 注 NOTE	
APPROVED 承认/APPROVED								REV. A	
								1/1	

上海四棱电机制造有限公司