



ROHS COMPLAINT

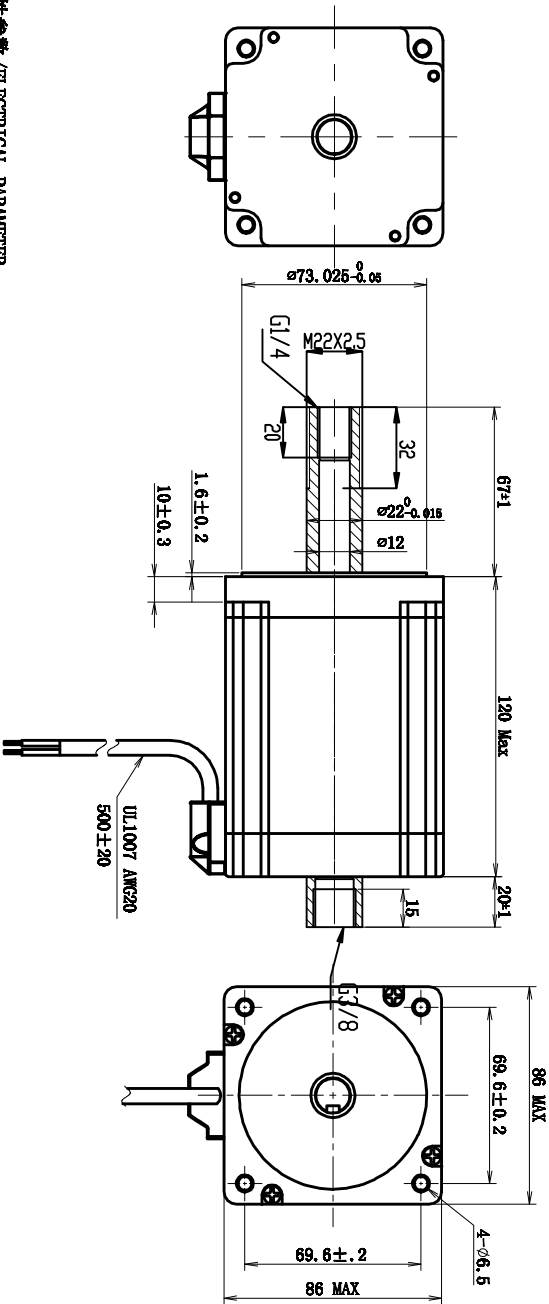

电器特性参数/ELECTRICAL PARAMETER

步 进 角 STEP ANGLE	1.8° ±5%
相 数 PHASES	2
额定电压 RATED VOLTAGE	3.6 V
额定电流 RATED CURRENT	6 A
电 阻 RESISTANCE	0.6 ohm±0.1 at 20° C
电 感 INDUCTANCE	— mH±20% at 1k Hz, 1Vrms
保持力矩 HOLDING TORQUE	8.4 N.m
运行力矩 (—PPS)	— MIN.
运行力矩 (4T —PPS)	(24V.DC, RATED CURRENT, FULL STEP)
绝缘耐压 DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻 INSULATION RESISTANCE	100 MΩ 以上/MIN.
绝缘等级 INSULATION CLASS	Class B
温度上升 TEMPERATURE RISE	80K MAX.
转子惯量 ROTOR INERTIA	3200 g.cm
重 量 WEIGHT	APPRO. 4Kg

非标前端盖	详见图纸
非标后端盖	详见图纸
转子内孔需线切割φ22	
非标抽套	

励磁顺序(2相励磁)
EXCITING SEQUENCE (TWO PHASE)

STEP	A	B	A-bar	B-bar
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CONTINUED/ACCEPTED BY CUSTOMER (客户确认/接受)		型号/MODEL	
COMPANY SIGNATURE (盖章/签名)		86H120-6004BZK-22	
一般公差 TOLERANCE	±0.3/±3°	版本	年月日
设计/DESIGNED	Taylor/2020-12-14	比例 SCALE	1:2
单位 UNIT	mm	品 名 TITLE	步进电机规格书 STEPPING MOTOR SPECIFICATION
审核/CHECKED	Taylor/2020-12-14	变更内容	设计
上海四微电机制造有限公司		备注 NOTE	REV. A
		THIRD ANGLE PROJECTION	1/1