

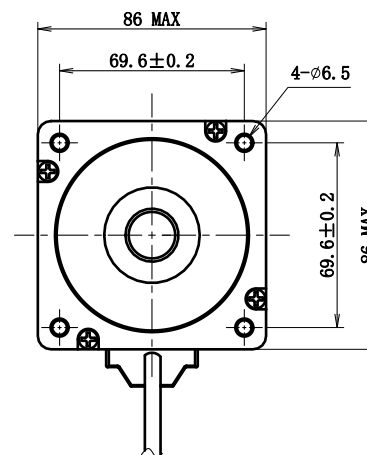
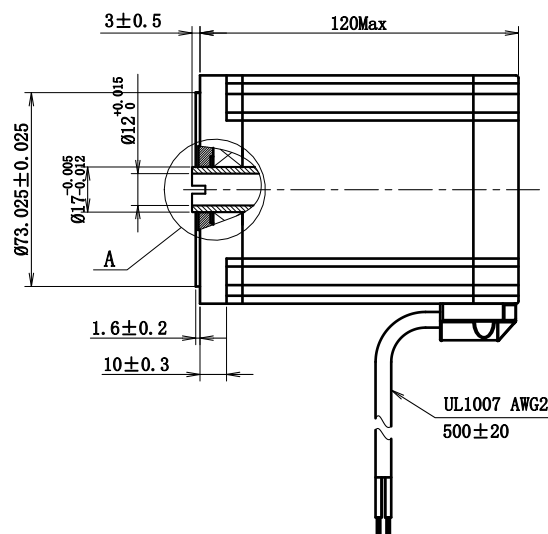




接线图/Wiring Diagram




励磁顺序(2相励磁)

EXCITING SEQUENCE (TWO PHASE)

STEP	A	B	$\bar{A}$	$\bar{B}$
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

电器特性参数/ELECTRICAL PARAMETER

步 进 角	STEP ANGLE	1.8° ±5%
相 数	PHASES	2
额定电压	RATED VOLTAGE	3.6 V
额定电流	RATED CURRENT	6.0 A
电 阻	RESISTANCE	0.60 ohm±0.1 at 20° C
电 感	INDUCTANCE	— mH±20% at 1k Hz, 1Vrms
保持力矩	HOLDING TORQUE	8.4 N.m
运行力矩 (—PPS)	RUNING TORQU (AT —PPS)	— MIN. (24V. DC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻	INSULATION RESISTANCE	100 MΩ 以上/MIN.
绝缘等级	INSULATION CLASS	Class B
温度上升	TEMPERATURE RISE	80K MAX.
转子惯量	ROTOR INERTIA	1600 g.cm (2.63oz. in)
重 量	WEIGHT	APPRO. 1000g



CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)						型号/MODEL	
COMPANY CHOP&SIGNATURE (盖章&签名)						86H2120-6004AZK1203-002	
一般公差 TOLERANCE ±0.3/±3°		版本	年 月 日	变更番号	变 更 内 容	设计	备 注 NOTE
设 计/DESIGNED		比例 SCALE	1:2	品 名 TITLE	步进电机规格书 STEPPING MOTOR SPECIFICATION		三视图 THIRD ANGLE PROJECTION
		单位 UNIT	mm				
审 核/CHECKED		上海四横电机制造有限公司					1/1