

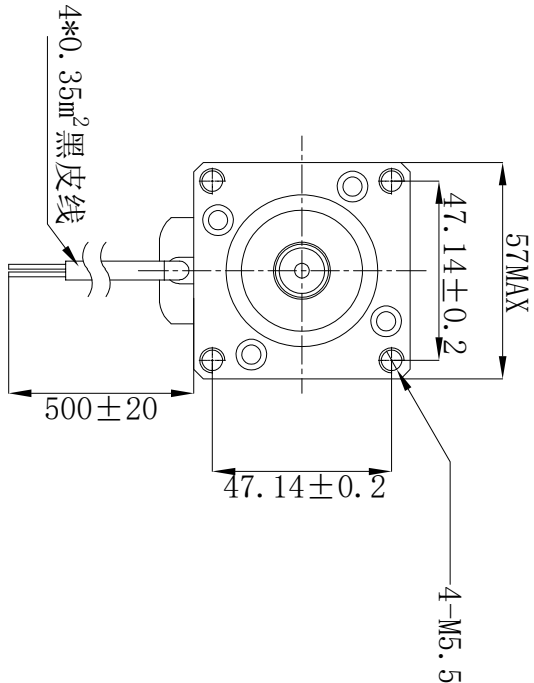
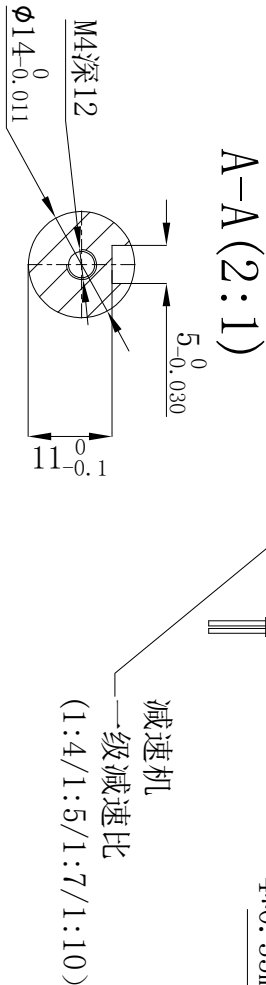
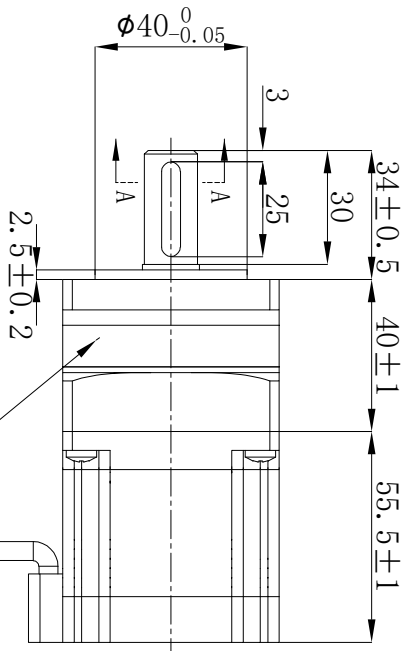


A

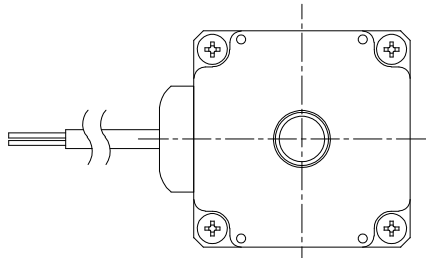

接线图/Wiring Diagram

U/白

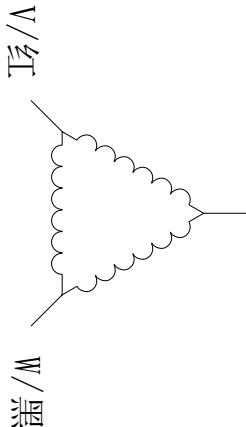

B

C

电器特性参数/ELECTRICAL PARAMETER

步 进 角	STEP ANGEL	1.8° ±5%
相 数	PHASES	3
额定电压	RATED VOLTAGE	--- V
额定电流	RATED CURRENT	--- A
电 阻	RESISTANCE	--- ohm±10% AT 20° C
电 感	INDUCTANCE	--- mH±20% AT 1k Hz, 1V RMS
保持力矩	HOLDING TORQUE	---N.m
运行力矩 (---PPS)		--- MIN.
RUNING TORQUE(AT --PPS)		(24VDC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V AC 1 MINUTIE
绝缘电阻	INSULATION RESISTANCE	100 MΩ MIN
绝缘等级	INSULATION CLASS	B
温度上升	TEMPERATURE RISE	80K MAX. (SEE NOTE 2)
转子惯量	ROTOR INERTIA	≈280g.cm ²
重 量	WEIGHT	APPROX. 1500g
最大轴向跳动	MAXIMUM AXIAL RUNOUT TOLERANCE	0.075mm (负载920g)
最大径向跳动	MAXIMUM RADIAL RUNOUT TOLERANCE	0.025mm (负载450g)
环境温度	AMBIENT TEMP	0℃-----+50℃
环境湿度	AMBIENT HUM	20%-----90%

D

E

CONFIRMED&ACCEPTED BY CUTOMER (客户确认&接受)						型号/MODEL	
COMPANY CHOP&SIGNATURE (盖章&签名)						57H356AG	
一般公差 TOLERANCE	± 0. 3 / ± 3°	版本 REV.	年 月 日 DATE	变更番号 ECO NO.	变 更 内 容 REVISIONS	设计 BY	备 注 NOTE
设 计/DESIGNED		比例 SCALE	1 : 1	品 名 TITLE	STEPPING MOTOR SPECIFICATION	步进电机规格书	
		单位 UNIT	mm				
审 核/CHECKED		上海四横电机制造有限公司					页 sheet
							1 / 1