

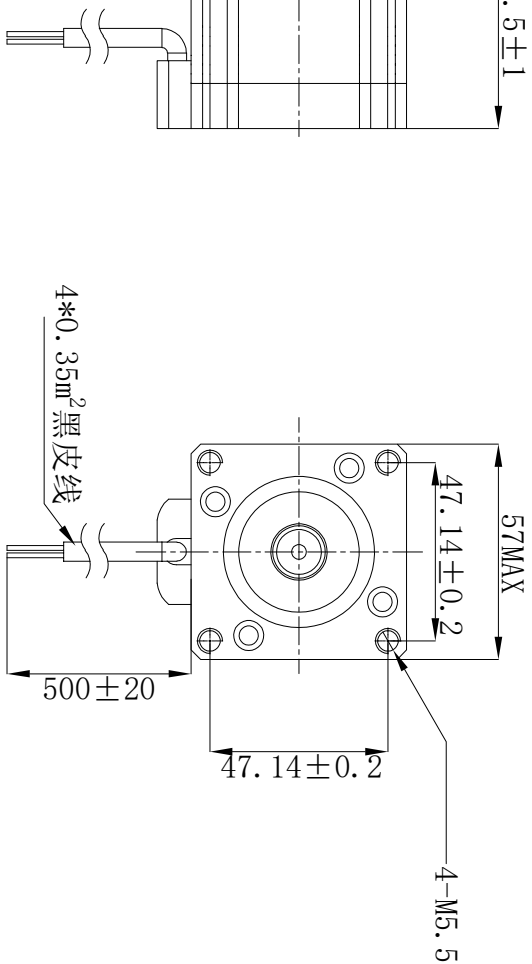
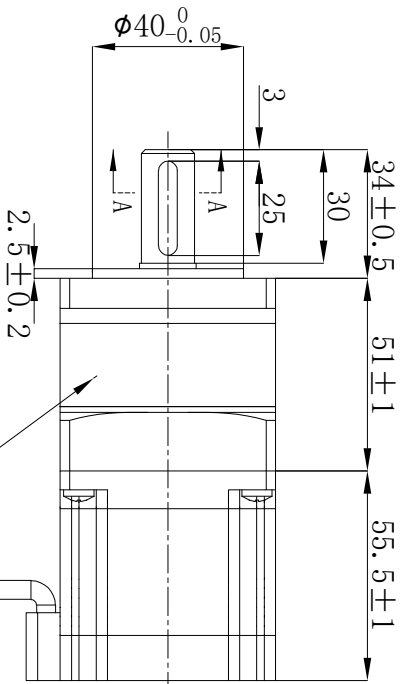



A

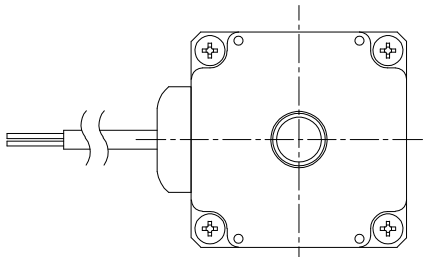

接线图/Wiring Diagram

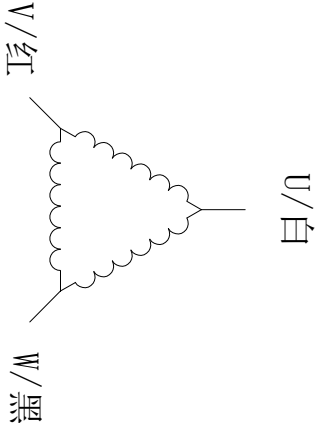

B

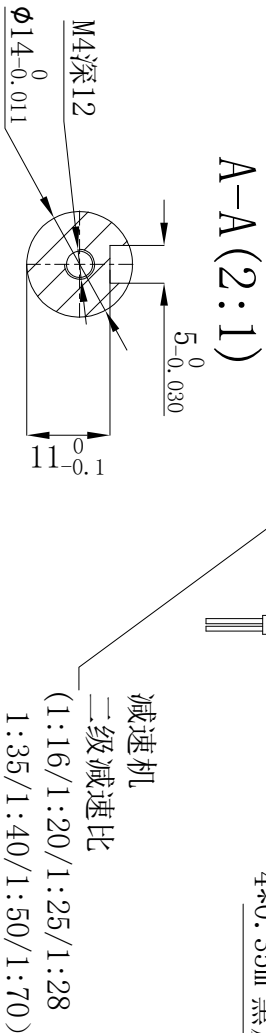

C

电器特性参数/ELECTRICAL PARAMETER

步 进 角	STEP ANGEL	1.8° ±5%
相 数	PHASES	3
额定电压	RATED VOLTAGE	— V
额定电流	RATED CURRENT	— A
电 阻	RESISTANCE	— ohm±10% AT 20° C
电 感	INDUCTANCE	— mH±20% AT 1k Hz, 1V RMS
保持力矩	HOLDING TORQUE	—N.m
运行力矩 (—PPS)		— MIN.
RUNING TORQUR(AT —PPS)		(24VDC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V AC 1 MINUTIE
绝缘电阻	INSULATION RESISTANCE	100 MΩ MIN
绝缘等级	INSULATION CLASS	B
温度上升	TEMPERATURE RISE	80K MAX. (SEE NOTE 2)
转子惯量	ROTOR INERTIA	≈280g.cm²
重 量	WEIGHT	APPROX. 1500g
最大轴向跳动	MAXIMUM AXIAL RUNOUT TOLERANCE	0.075mm (负载920g)
最大径向跳动	MAXIMUM RADIAL RUNOUT TOLERANCE	0.025mm (负载450g)
环境温度	AMBIENT TEMP	0°C-----+50°C
环境湿度	AMBIENT HUM	20%-----90%

D

CONFIRMED&ACCEPTED BY CUTOMER (客户确认&接受)				型号/MODEL			
COMPANY CHOP&SIGNATURE (盖章&签名)				57H356AG			
							</