
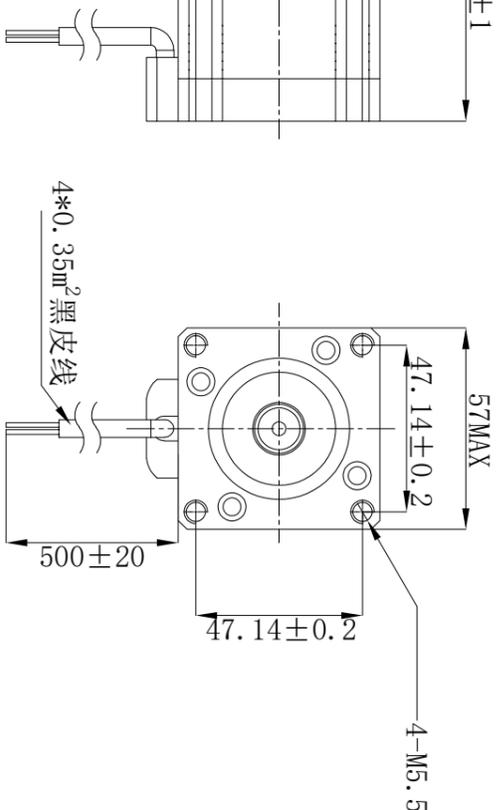
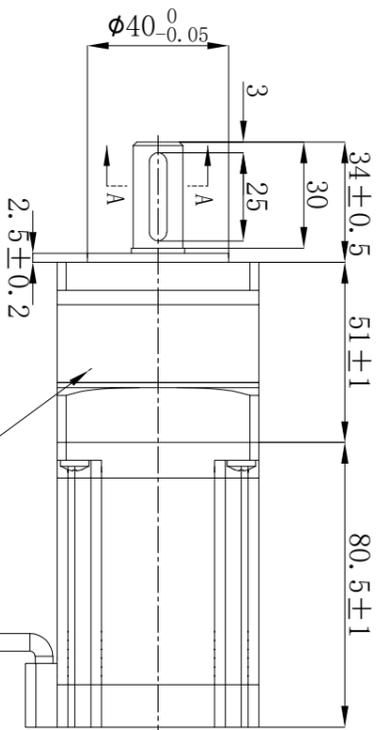


A

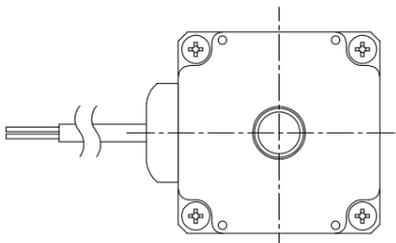


接线图/Wiring Diagram

U/白

V/红

W/黑

A-A (2:1)

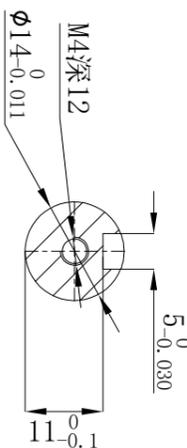

减速机

二级减速比

(1:16/1:20/1:25/1:28

1:35/1:40/1:50/1:70)

电器特性参数/ELECTRICAL PARAMETER

步进角 STEP ANGEL	1.8° ±5%
相数 PHASES	3
额定电压 RATED VOLTAGE	-- V
额定电流 RATED CURRENT	-- A
电阻 RESISTANCE	-- ohm±10% AT 20° C
电感 INDUCTANCE	-- mH±20% AT 1k Hz, 1V RMS
保持力矩 HOLDING TORQUE	--N.m
运行力矩 (---PPS) RUNING TORQUR (AT ---PPS)	--- MIN. (24VDC, RATED CURRENT, FULL STEP)
绝缘耐压 DIELECTRIC STRENGTH	500V AC 1 MINUTIE
绝缘电阻 INSULATION RESISTANCE	100 MΩ MIN
绝缘等级 INSULATION CLASS	B
温度上升 TEMPERATURE RISE	80K MAX. (SEE NOTE 2)
转子惯量 ROTOR INERTIA	≈520g.cm ²
重量 WEIGHT	APPROX. 2400g
最大轴向跳动 MAXIMUM AXIAL RUNOUT TOLERANCE	0.075mm (负载920g)
最大径向跳动 MAXIMUM RADIAL RUNOUT TOLERANCE	0.025mm (负载450g)
环境温度 AMBIENT TEMP	0°C-----+50°C
环境湿度 AMBIENT HUM	20%-----90%

CONFIRMED&ACCEPTED BY CUTOMER
(客户确认&接受)

COMPANY CHOPRESIGNATURE (盖章&签名)

一般公差
TOLERANCE ±0.3/±3°

版本
REV. DATE

年月日

变更内容
REV. BY

设计
BY

备注
NOTE

设计/DESIGNED

比例
SCALE 1:1

品名
TITLE

步进电机规格书
STEPPING MOTOR SPECIFICATION

REV. A

审核/CHECKED

上海四横电机制造有限公司

页
SHEET

1/1

E

D

C

B