
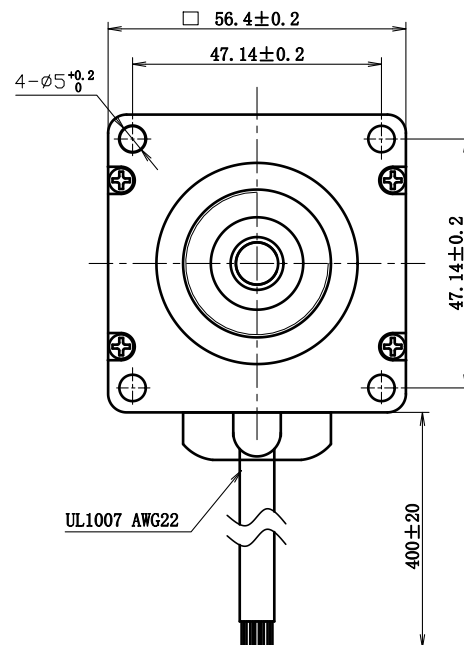
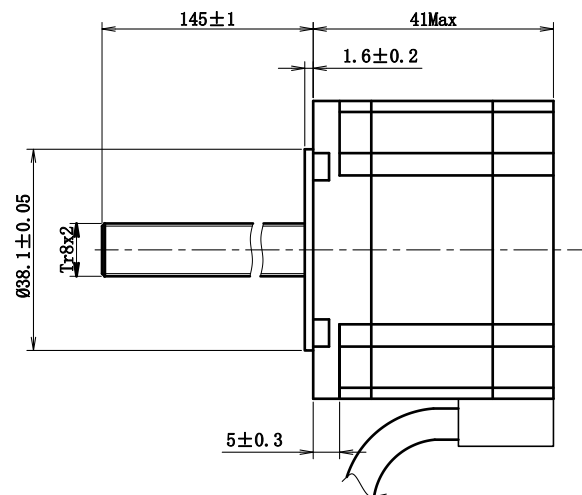


A

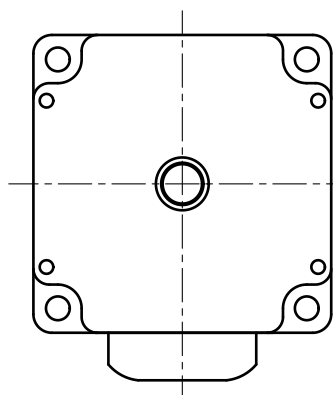


STEP	A	B	$\bar{A}$	$\bar{B}$
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

C

步 进 角	STEP ANGEL	1.8° ±5%
相 数	PHASES	2
额定电压	RATED VOLTAGE	2.4 V
额定电流	RATED CURRENT	2.0 A
电 阻	RESISTANCE	1.2 ohm±0.1 at 20° C
电 感	INDUCTANCE	—mH±20% at 1k Hz, 1Vrms
保持力矩	HOLDING TORQUE	0.6 N.m
运行力矩 (—PPS)		— MIN.
RUNING TORQU (AT —PPS)		(24V. DC, RATED CURRENT, FULL STEP)
绝缘耐压	DIELECTRIC STRENGTH	500V A.C 1分钟/MINITE
绝缘电阻	INSULATION RESISTANCE	100 MΩ 以上/MIN.
绝缘等级	INSULATION CLASS	Class B
温度上升	TEMPERATURE RISE	80K MAX.

滑块尺寸(材料铜)

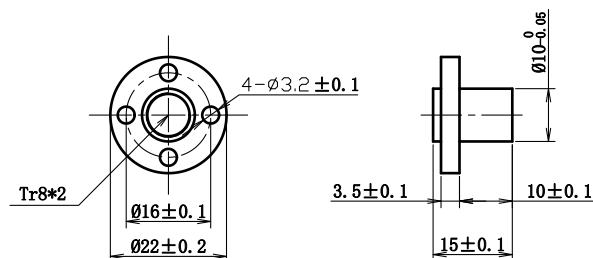

							型号/MODEL			
							57H241-2004AST080214			
一般公差 TOLERANCE ±0.3/±3°		版本 REV.	年 月 日 DATE	变更序号 ECO NO.	变 更 内 容 REVISIONS		设计 BY	备 注 NOTE	REV.	A
设 计/DESIGNED				比例 SCALE	1:1	品 名 TITLE	步进电机规格书		三视图 THIRD ANGLE PROJECTION	
				单位 UNIT	mm					
审 核/CHECKED				上海四横电机制造有限公司					页 SHEET	1/1

F