

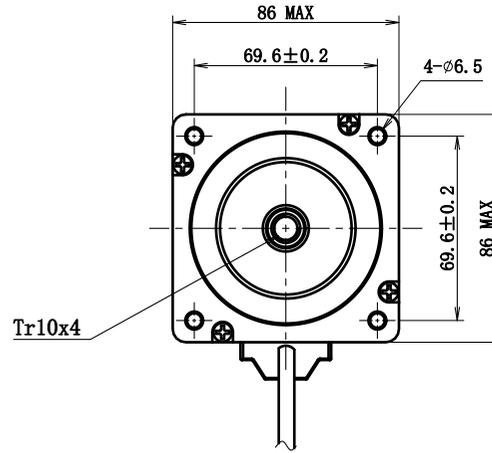
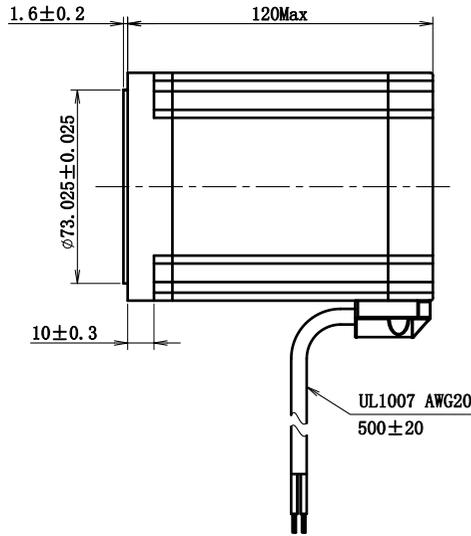


RoHS COMPLAINT

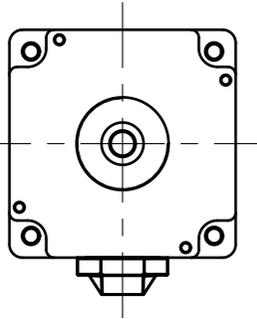

接线图/Wiring Diagram

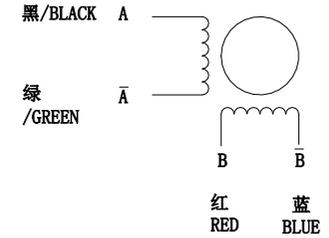

励磁顺序 (2相励磁)
EXCITING SEQUENCE (TWO PHASE)

STEP	A	B	Ā	B̄
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CW CCW

电器特性参数/ELECTRICAL PARAMETER

步进角 STEP ANGEL	1.8° ±5%
相数 PHASES	2
额定电压 RATED VOLTAGE	3.6 V
额定电流 RATED CURRENT	6.0 A
电阻 RESISTANCE	0.6 ohm±0.1 at 20° C
电感 INDUCTANCE	--- mH±20% at 1k Hz, 1Vrms
保持力矩 HOLDING TORQUE	8.4 N.m
运行力矩 (—PPS) RUNING TORQUR (AT —PPS)	— MIN. (24V. DC, RATED CURRENT, FULL STEP)
绝缘耐压 DIELECTRIC STRENGTH	500V A. C 1分钟/MINUTE
绝缘电阻 INSULATION RESISTANCE	100 MΩ 以上/MIN.
绝缘等级 INSULATION CLASS	Class B
温度上升 TEMPERATURE RISE	80K MAX.
转子惯量 ROTOR INERTIA	1600 g. cm (2.63oz. in)
重量 WEIGHT	APPRO. 1000g

CONFIRMED&ACCEPTED BY CUYOMER (客户确认&接受)						型号/MODEL	
COMPANY CHOP&SIGNATURE (盖章&签名)						86H2120-6004GTS1004	
一般公差 TOLERANCE	±0.3/±3°	版本	年月日	变更番号	变更内容	设计	备注 NOTE
设计/DESIGNED		比例 SCALE	1:2	品名 TITLE	步进电机规格书 STEPPING MOTOR SPECIFICATION		三视图 THIRD ANGLE PROJECTION
审核/CHECKED		单位 UNIT	mm	上海四横电机制造有限公司		页 SHEET	1/1