


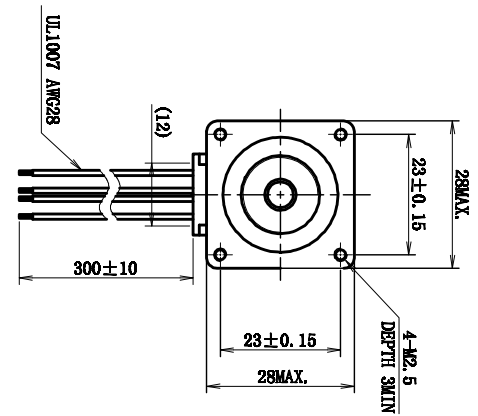


符合GB3558指令要求
CONFORM TO GB3558 INSTRUCTIONS

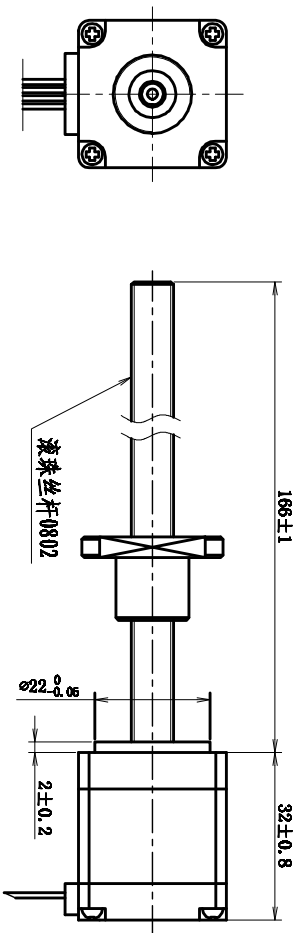

电器特性参数/ELECTRICAL PARAMETER

步 进 角 STEP ANGLE	1.8° ±5%
相 数 NO. OF PHASES	2
额定电压 RATED VOLTAGE	3.8 V
额定电流 RATED CURRENT	0.67 A
电 阻 RESISTANCE	5.6 ohm±10% AT 25° C
电 感 INDUCTANCE	4.2 mH±20%
保持力矩 HOLDING TORQUE	0.06 N.m
运行力矩 (-PPS) RUNING TORQUE (AT -PPS)	— MAX.
绝缘耐压 DIELECTRIC STRENGTH	(24VDC, RATED CURRENT, FULL STEP)
绝缘电阻 INSULATION RESISTANCE	500V AC 1 MINUTIE
绝缘等级 INSULATION CLASS	100 MΩ MIN.
温度上升 TEMPERATURE RISE	B
转子惯量 ROTOR INERTIA	80K MAX. (SEE NOTE 2)
重 量 WEIGHT	9g.cm ²
允许轴向负载 ALLOWABLE THRUST LOAD	APPROX. 110g
允许径向负载 ALLOWABLE RADIAL LOAD	15N
环境温度 AMBIENT TEMPERATURE	75N(ON THE SHAFT END)
环境湿度 AMBIENT HUMIDITY	0° C TO +50° C
寿命 L.I.F.E	15% TO 95%
	3000 HOURS (SEE NOTE)

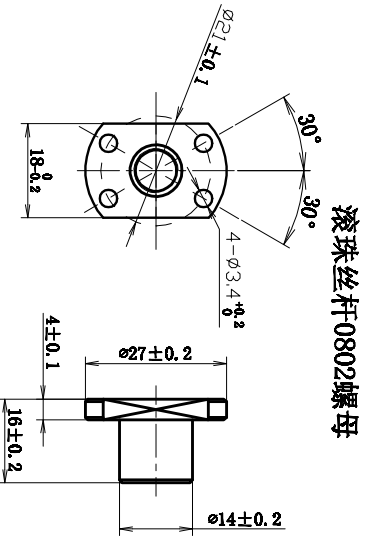

CONFIRMED/ACCEPTED BY CUSTOMER (客户确认/接受)										型号/MODEL 28B232-06746ZS0802-166	
CUSTOMER'S COMPANY 客户名称											
DESIGNER 设计/DESIGNED		Taylor/2019-04-24		SCALE 比例		1:1		品 名 TITILE		步进电机规格书 STEPPING MOTOR SPECIFICATION	
CHECKER 审核/CHECKED		Taylor/2019-04-24		UNIT 单位		MM					
APPROVED 承认/APPROVED								上海同致电机制造有限公司		1/1	